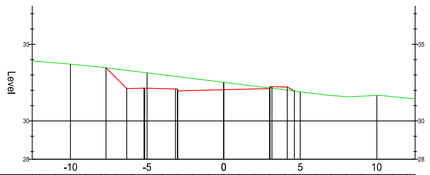

Proposed Levels						33.47	32.783	32.116	32.133	32.108	31.986	31.986	32.011	32.04	32.061	32.086	32.111	32.215	31.95				
Levels	33.677	33.793	33.703	33.607	33.508	33.385	33.261	33.138	33.015	32.892	32.768	32.645	32.522	32.398	32.275	32.152	32.029	31.905	31.782	31.662	31.585	31.614	31.670	31.898	31.489
Offset	-12.00	-11.00	-10.00	-9.00	-8.00	-7.00	-6.00	-5.00	-4.00	-3.00	-2.00	-1.00	0.00	1.00	2.00	3.00	4.00	5.00	6.00	7.00	8.00	9.00	10.00	11.00	12.00

CROSS SECTION THROUGH ESCARPMENT ROAD LOWER - CHAINAGE 20m
HORZ SCALE 1:200; VERT SCALE 1:200

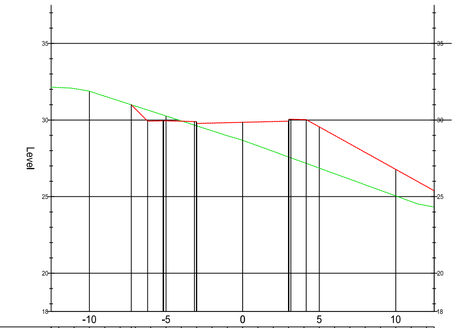

Proposed Levels					31.69	31.725	29.930	29.946	29.921	29.800	29.800	29.825	29.85	29.875	29.900	29.925	30.028	28.997	28.441	27.886	27.330	26.775	26.219	25.664	25.664
Levels	32.119	32.050	31.875	31.553	31.230	30.908	30.586	30.263	29.941	29.618	29.296	28.973	28.674	28.314	27.951	27.587	27.224	26.860	26.497	26.134	25.770	25.407	25.044	24.680	24.415
Offset	-12.00	-11.00	-10.00	-9.00	-8.00	-7.00	-6.00	-5.00	-4.00	-3.00	-2.00	-1.00	0.00	1.00	2.00	3.00	4.00	5.00	6.00	7.00	8.00	9.00	10.00	11.00	12.00

CROSS SECTION THROUGH ESCARPMENT ROAD LOWER - CHAINAGE 60m
HORZ SCALE 1:200; VERT SCALE 1:200

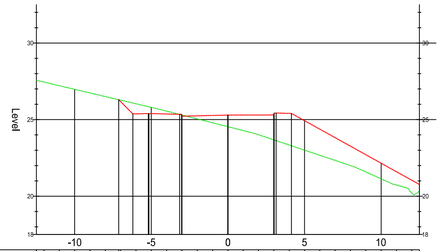

Proposed Levels					28.991	28.991	25.376	25.392	25.367	25.246	25.246	25.271	25.30	25.299	25.301	25.329	25.408	24.932	24.376	23.821	23.265	22.710	22.154	21.599	21.043
Levels	27.446	27.211	26.976	26.741	26.505	26.270	26.035	25.799	25.564	25.300	25.046	24.792	24.538	24.284	24.013	23.677	23.342	23.007	22.672	22.337	22.002	21.586	21.135	20.733	20.212
Offset	-12.00	-11.00	-10.00	-9.00	-8.00	-7.00	-6.00	-5.00	-4.00	-3.00	-2.00	-1.00	0.00	1.00	2.00	3.00	4.00	5.00	6.00	7.00	8.00	9.00	10.00	11.00	12.00

CROSS SECTION THROUGH ESCARPMENT ROAD LOWER - CHAINAGE 120m
HORZ SCALE 1:200; VERT SCALE 1:200

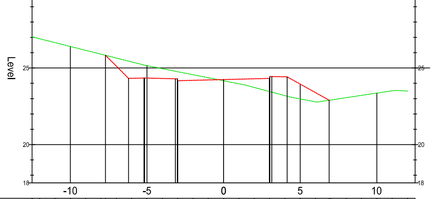

Proposed Levels					25.83	25.120	24.325	24.341	24.316	24.195	24.195	24.220	24.25	24.270	24.295	24.345	24.424	23.948	23.392	22.99					
Levels	26.907	26.655	26.404	26.152	25.901	25.649	25.398	25.153	24.956	24.759	24.562	24.364	24.167	23.970	23.731	23.464	23.196	22.979	22.789	22.913	23.063	23.213	23.363	23.513	23.496
Offset	-12.00	-11.00	-10.00	-9.00	-8.00	-7.00	-6.00	-5.00	-4.00	-3.00	-2.00	-1.00	0.00	1.00	2.00	3.00	4.00	5.00	6.00	7.00	8.00	9.00	10.00	11.00	12.00

CROSS SECTION THROUGH ESCARPMENT ROAD LOWER - CHAINAGE 180m
HORZ SCALE 1:200; VERT SCALE 1:200

Notes

1. All dimensions are in metres unless noted otherwise.
2. All levels are in metres unless noted otherwise.

Key to symbols

Existing Ground Level

Proposed Finished Level

Reference drawings

MMD-409577-C-DR-00-XX-1203 - Long Sections Through Escarpment Roads
MMD-409577-C-DR-00-XX-1208 - Cross Sections Through Escarpment Road Upper

Rev	Date	Drawn	Description	Ch'k'd	App'd
P1	05:21	EW	Preliminary Issue	JM	KB

MOTT MACDONALD

Greenhead
Lerwick
Shetland
ZE1 0PY
United Kingdom
T +44 (0)1595 695049
F
W mottmac.com

Client

Hjaltland Housing Association Ltd
2 Harbour Street
Lerwick
Shetland
ZE1 0LR

Title

Proposed Housing at Staneyhill, Lerwick
Work Stream 1 - Civils Infrastructure
Cross Sections Through Escarpment Road Lower - Chainages 20m, 60m, 120m and 180m

Designed	P Richardson	PR	Eng check	J Moncrieff	JM
Drawn	E Wishart	EW	Coordination	J Moncrieff	JM
Dwg check	J Moncrieff	JM	Approved	K Burnett	KB

Scale at A1	Status	Rev	Security
1:200	PRE	P1	STD

Drawing Number

MMD-409577-C-DR-00-XX-1207

© Mott MacDonald
This document is issued for the party which commissioned it and for specific purposes connected with the captioned project only. It should not be relied upon by any other party or used for any other purpose.
We accept no responsibility for the consequences of this document being relied upon by any other party, or being used for any other purpose, or containing any error or omission which is due to an error or omission in data supplied to us by other parties.

1:200 0 10m 20m

P:\Lerwick\PROJECTS\409577 Staneyhill\MM Drawings\PRELIMINARY DRAWINGS\Roads Construction Consent\Spine Road and Escarpment Roads\MMD-409577-C-DR-00-XX-1207 P1.dwg May 6, 2021 - 10:01AM WIS28234